

# The masterpiece of roofing tiles made in Japan.

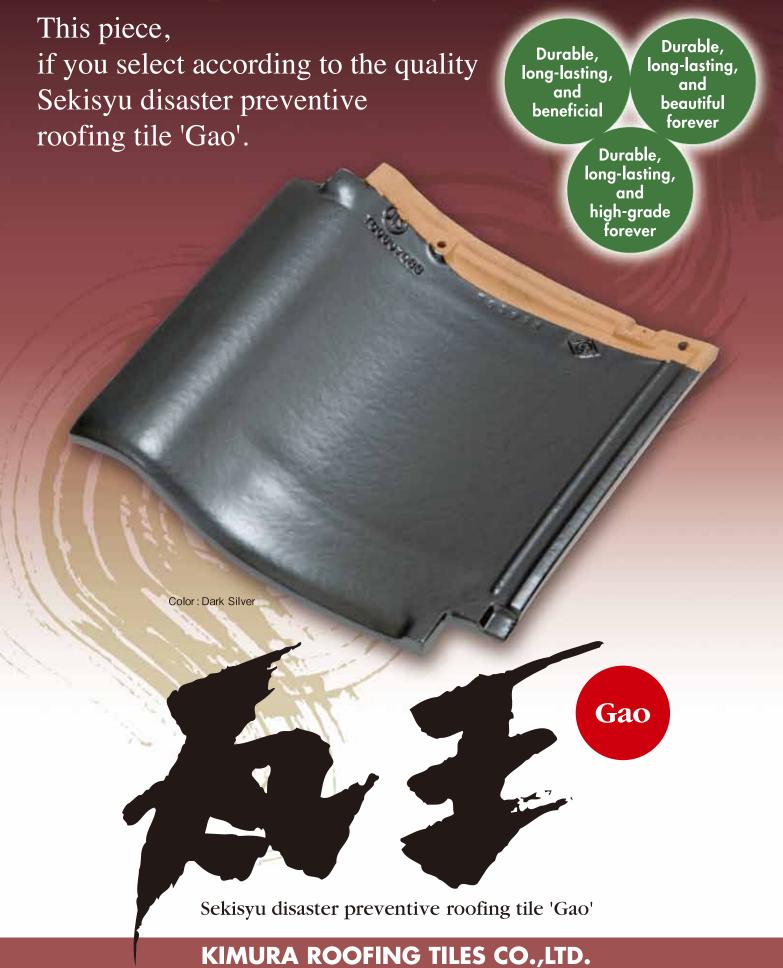

Our roofing tiles can be used on building with a roof slope of 33% degrees.

The material is different. The hardening is different. The thickness is different. The skillfulness is different. The shape is different.

That is why Sekisyu Roofing tiles are said to be high quality roofing tiles.



### **Color Choice**



### Points of Sekisyu Roofing Tile

Material

Our roofing tiles are fireproof and made of carefully selected, flexible clay.

**Firing Temperature** 

Our roofing tiles are fired at a temperature higher than 1200°C(2192°F), the highest level for the ceramics. So they are durable against the heat and the cold, which maintains the roof's beauty forever.

Thickness

Its thickness, which is expressed in millimeters, creates not only the strength but also the dignified and high-grade product image.

**Featuring** 

Our roofing tiles are designed to be durable against rain and gale.

Shape

Our S style roofing tiles are European style and designed to prevent rain from entering.


### **Specs. of the Product**

### Sekisyu disaster prevention roofing tile 'Gao'

measure	total length: 295mm total width: 315mm	
functional measure	length	225mm
	width	275mm
the number of roofing tiles	16 tiles per 1 square meter 53 tiles per 3.3 square meters	
weight	46.0kg per 1 square meter 151.0kg per 3.3 square meter	

### The outline of the quality of the material

· ·		
item	test results	
the strength of our roofing tiles against bending destruction	stronger than 2,000N	
water suction rate	less than 6%	
the test result of frost damage	no trouble	



# Allocation Size of Roofing Tiles (The Size of Length is mm) 15 260 276 276 276 276 255 15 Left wing 260 + 276 × number of roofing tiles + right wing 255 Beamwise direction 221 205 + 221 × number of roofing liles 3 4.5 10 Cross-beamwise direction



## KIMURA ROOFING TILES CO., LTD. 1501 Tsunozu-Cho, Gotsu-shi, Shimane Prefecture, 695-0021 Japan Phone 81-855-53-0618 Fax 81-855-53-0699